

PFT SAMBA XL FC-230V



The powerful airless piston pump

Faster and cleaner paint application – no problem for the airless pump of the PFT SAMBA family. Pasty materials such as paints, varnishes and even filler can be applied as precisely on the wall and ceiling.



TECHNICAL DATA

Part no.	00 60 18 02
Working pressure	max. 227 bar
Conveying capacity	5.5 l/min
Motor	230 V, 1 Ph, 50/60 Hz, 1.65 kW
Operation and control	pump capacity continuously adjustable
Wheels	2
Spraying gun with nozzle holder	In Line Texspray DN9 30°
Nozzle	RAC X 531 and 535
Nozzle size	max. 0,037"
Pump outlet	DN9
Delivery hose	High pressure hose DN9 – 15 m Hose whip DN6 – 0,9 m
Dimensions: L/W/H	670/780/730 – 1.020 mm, height adjustable
Weight	~ 58 kg



ADVANTAGES AT A GLANCE



- 1** SmartControl system and digital display for pressure display (uniform, less water-sensitive circuit board)
- Especially for abrasive and viscous materials


PFT praktische TIP:

Filtering is your best protection against premature pump and gun wear, surface defects and clogging of the nozzle.

The filters assure you the best material flow, and protect against annoying blockages.

What is decisive for your material is the mesh size:

- Fine materials: Mesh size 200
- Coarse materials: Mesh size 30

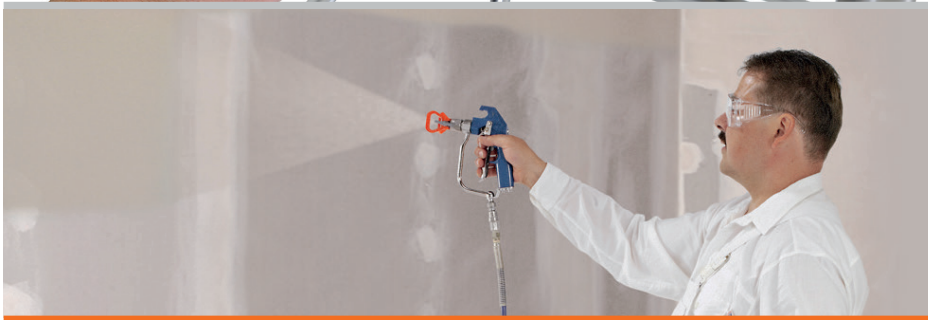

FIELDS OF APPLICATION

- Dispersions
- Sprayable compounds / fillers
- Corrosion and rust protection
- Large area roof coating
- Adhesives and facade paints
- Silicate paints



ACCESSORIES

- Bag squeezer
- Plastic bucket, black, capacity: 90 litre
- Conversion kit – air support for attractive surface structure
- Filter pump, mesh size 30 – coarse materials
- Filter pump, mesh size 60
- Filter pump, mesh size 100
- Filter pump, mesh size 200 – fine materials

PART NO.

- 00 09 86 27
- 20 22 73 00
- 00 15 60 87
- 00 09 61 35
- 00 12 95 96
- 00 16 11 73
- 00 16 11 74



The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

www.pft.eu
www.youtube.com/knaufpft

Download now! APP: PFT – Plastering Technology

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · 97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft-iphofen.de www.pft.eu

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT SAMBA XL FC-230V – GB/08.17/PFT